

## ARMORPOXY II & ARMORULTRA FLOOR COATING SYSTEMS

**ARMORPOXY II** is a unique self-priming industrial coating normally used in conjunction with ArmorUltra Topcoat but can be used alone for less demanding environments. Easy to apply, Armorpoxy II is a 50/50 mix, and once mixed, applied just like paint. Armorpoxy II can be applied to bare concrete or painted floors (properly prepped) or wood and metal primed surfaces. Applies at 7 - 12 mils standard thickness. See our Technical Datalink on our website for full info. Armorpoxy II comes standard in a satin finish. For high gloss, use Armor Ultra Topcoat. For maximum wear/skid resistance combine Ultra Wear High Wear Non-Skid Additive to ArmorUltra Topcoat. Armorpoxy II is our best-selling epoxy floor coating system, used by the U.S. Coast Guard & Air Force in their hangars. Applies with standard rollers; no special skills are required.

**ARMORULTRA** is our finest, thickest, and moist durable military-grade flooring system. ArmorUltra is a 3-layer system of primer, high build Ultra Epoxy, and ArmorUltra Top-coat. ArmorUltra, when applied, results in a 23-30 mils thick floor, thick enough for super-demanding applications. Primer and topcoat apply with standard rollers, Ultra epoxy applies with our supplied notched squeegee, allowing for the 'high build' and thickness. ArmorUltra is approximately 2.5-3 times thicker than Armorpoxy II.

## POLYMER COATINGS COLOR CHART








Khaki Tan

Traffic Yellow

Safety Yellow










Desert Tan

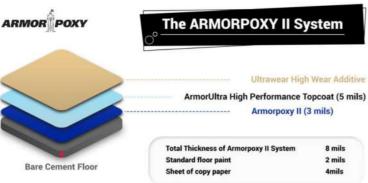

So... Armorpoxy II is over 4 times thicker than floor paint!